



Supercontinuum light shaping with GPC

Bañas, Andrew Rafael; Palima, Darwin; Villangca, Mark Jayson; Kopylov, Oleksii; Glückstad, Jesper

Publication date:
2015

[Link back to DTU Orbit](#)

Citation (APA):

Bañas, A. R., Palima, D., Villangca, M. J., Kopylov, O., & Glückstad, J. (2015). *Supercontinuum light shaping with GPC*. Abstract from Cost Action MP1205 , Porto, Portugal.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Supercontinuum light shaping with GPC

Andrew Bañas, Darwin Palima, Mark Villangca, Oleksii Kopylov and Jesper Glückstad

DTU Fotonik, Dept. Photonics Engineering, Ørsted Plads 343
Technical University of Denmark, DK-2800 Kgs. Lyngby, Denmark
<http://www.ppo.dk>

Many important applications of the interaction of light with matter strongly depend on the illumination wavelength. Hence, supercontinuum light sources have been used in a plurality of applications that include optical characterization or sensing in optofluidic systems, optical coherence tomography, spectroscopy, imaging and microscopy, neuroscience and neurophotonics, and metrology among many others. A proper choice of wavelength from a supercontinuum source can alter the properties or behavior of materials or biological systems. Combining spectral control with spatial control further increases the versatility of supercontinuum sources, hence offering new possibilities for research. For example, selective excitation and characterization enabled by structured multi-wavelength light would be desirable for probing cells or tissues in neurophotonics or optogenetics research. However, to enable such possibilities, it is necessary to deal with the complications of efficiently shaping light across different wavelengths. Generalized Phase Contrast (GPC) is a versatile light shaping technique for efficiently rerouting and managing photon energy into speckle-free contiguous spatial light distributions. GPC exhibits robustness to shifts in wavelength and can maintain both projection length scale and high efficiency over a range of 0.75x to 1.5x of a characteristic design wavelength [1]. We verify this performance using a supercontinuum light source [2], interfaced with a compact GPC light shaper, optimized for standard Gaussian input beams [3,4]. Preliminary light shaping experiments show ~70% efficiency, ~3x intensity gain, and ~85% energy savings from 500nm to 675nm, in good agreement with theoretical and numerical predictions.

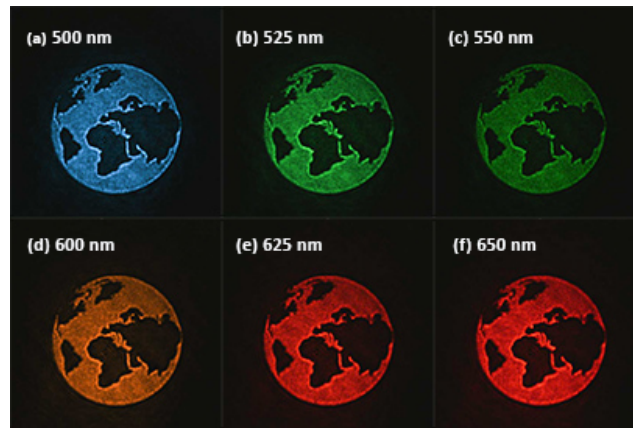


Figure. CCD images of GPC projections from the same setup, as the wavelength selector is varied from 500nm to 650nm.

References

1. D. Palima and J. Glückstad, "Multi-wavelength spatial light shaping using generalized phase contrast," *Opt. Express* **16**, 1331–1342 (2008).
2. Oleksii Kopylov, Andrew Bañas, Mark Villangca, Darwin Palima, and Jesper Glückstad, "GPC light shaping a supercontinuum source," *Opt. Express* **23**, 1894-1905 (2015).
3. Andrew Bañas, Oleksii Kopylov, Mark Villangca, Darwin Palima, and Jesper Glückstad, "GPC light shaper: static and dynamic experimental demonstrations," *Opt. Express* **22**, 23759-23769 (2014).
4. A. Bañas, D. Palima, M. Villangca, T. Aabo, and J. Glückstad, "GPC light shaper for speckle-free one- and two-photon contiguous pattern excitation," *Opt. Express* **7102**, 5299–5310 (2014).